

Application Work Sheet (Pressure)

☐ Quotation

☐ Purchase Order

For better customer satisfaction and to minimize risks, we request you to fill out this form for all application as exactly as possible, when you quotation or place order.

General Information

Client	_____	Date	_____
Name	_____	End-User	_____
TEL. No.	_____	Project	_____
FAX. No.	_____	Required delivery	_____
Model	_____		
Quantity	_____		

Performance Specifications

Temperature Range _____

Operating Range _____

Measuring Unit ☐ °C ☐ °F

Temperature Sensor ☐ RTD _____ ☐ T/C _____

Output Signal ☐ 4 ~ 20 mA ☐ RTD 100Ω ☐ RTD 1000Ω ☐ T/C

Power Supply ☐ 24 V DC ☐ 12 V DC

Physical Specifications

Process Connection ☐ PT 1/2" ☐ PT 3/8"

☐ 1.5S Tri-Clamp ☐ 3/4S Tri-Clamp

☐ 10K, 25A Flange ☐ 10K, 40A Flange ☐ 10K, 50A Flange

☐ 1", 150# Flange ☐ 1.5" 150# Flange ☐ 2", 150# Flange

☐ Other _____

Electrical Connection ☐ Terminal ☐ DIN 43650 ☐ Cable(1.5 m)

Local Display Unit ☐ None ☐ LCD ☐ LED

Process Conditions

Process Media _____

Operating Temperature _____

Humidity _____

Vibration _____

Explosion Protection ☐ Required ☐ No required

Weather Protection ☐ Required ☐ No required

Pressure Range Code

CODE	kgf/cm ²	bar	psi	MPa
0001	0~1	0~1	0~15	0~0.1
0003	0~3	0~3	0~45	0~0.3
0005	0~5	0~5	0~70	0~0.5
0006	0~6	0~6	0~90	0~0.6
0010	0~10	0~10	0~150	0~1
0015	0~15	0~15	0~200	0~1.5
0020	0~20	0~20	0~300	0~2
0025	0~25	0~25	0~350	0~2.5
0030	0~30	0~30	0~450	0~3
0035	0~35	0~35	0~500	0~3.5
0050	0~50	0~50	0~700	0~5
0070	0~70	0~70	0~1000	0~7
0100	0~100	0~100	0~1500	0~10
0200	0~200	0~200	0~3000	0~20
0250	0~250	0~250	0~3500	0~25
0300	0~300	0~300	0~4500	0~30
0350	0~350	0~350	0~5000	0~35
0500	0~500	0~500	0~7000	0~50
0700	0~700	0~700	0~10000	0~70
1000	0~1000	0~1000	0~15000	0~100
2000	0~2000	0~2000	0~28000	0~200
V0000	-76~0 cmHg	-1013~0 mbar	-30~0 inHg	-0.1~0
V0001	-76 cmHg~1	-1013 mbar~1	-30 inHg~15	-0.1~0.1
V0002	-76 cmHg~2	-1013 mbar~2	-30 inHg~30	-0.1~0.2
V0003	-76 cmHg~3	-1013 mbar~3	-30 inHg~45	-0.1~0.3
V0004	-76 cmHg~4	-1013 mbar~4	-30 inHg~60	-0.1~0.4
V0006	-76 cmHg~6	-1013 mbar~6	-30 inHg~90	-0.1~0.6
V0010	-76 cmHg~10	-1013 mbar~10	-30 inHg~150	-0.1~1
V0015	-76 cmHg~15	-1013 mbar~15	-30 inHg~200	-0.1~1.5
V0020	-76 cmHg~20	-1013 mbar~20	-30 inHg~300	-0.1~2
L0600	0~600 mmH2O	0~60 mbar	0~0.9	0~0.006
L1000	0~1000 mmH2O	0~100 mbar	0~1.5	0~0.01
L2000	0~2000 mmH2O	0~200 mbar	0~3	0~0.02
L3000	0~3000 mmH2O	0~300 mbar	0~4.5	0~0.03
L4000	0~4000 mmH2O	0~400 mbar	0~5.5	0~0.04
L5000	0~5000 mmH2O	0~500 mbar	0~7	0~0.05
00000	Other Range			

Pressure

Temperature

Level

The Other

Diaphragm Seal

Pressure & Temperature

P201 Series General Purpose Pressure Transmitter



Feature

- General purpose pressure transmitter for industrial applications
- Measuring ranges from 0~0.01 to 100 MPa, including vacuum & compound
- Advanced Piezoresistive or SOS measuring cell
- All welded structure(Except < 1 bar)
- Excellent accuracy and long term stability

Applications

Wide range of applications such as process control and below.

- Hydraulic system and pneumatic equipments
- Freon and ammonia refrigerator
- Machine tools and automatic machinery flow control
- On and off-shore industry
- Chemical and petrochemical industry
- Engine monitoring and control
- Fire fighting equipments and braking system for railway

Input

Technology	Piezoresistive silicon pressure sensor, thin film or strain gauge
Pressure range	0 ~ 0.01 to 100 MPa Gauge, Vacuum or Compound pressure 0 ~ 0.1 to 3.5 MPa Absolute pressure
Pressure reference	Gauge, including vacuum, compound and absolute
Overload pressure	1.5 times of F.S. (Max, 100 MPa)

Output

	Current output		Voltage output	
Electrical connection type	2Wire technique		3 or 4 Wire technique	
Full scale output signal	20 mA	± 0.05 %	5 V	± 0.05 %
Zero measured output	4 mA	± 0.03 %	1 V	± 0.03 %
	Other signals available on request			

Electrical Specifications

Power supply	12 ~ 36 V DC (It is not free voltage)
Load resistance max@24 V	500 Ω at 24 V
Power ripple	≤ 500 mV P-P
Insulation resistor	≥ 20 MΩ, 25 V DC


Performance Specifications

Accuracy	≤ ± 0.25 % F.S.
Non-linearity	± 0.100 % F.S. typical
Repeatability	± 0.03 % F.S. typical
Pressure hysteresis	± 0.03 % F.S. typical
Long term stability	± 0.1 % F.S. over 1 year
Response time (10 % to 90 %)	≤ 20 ms
Reference temperature	25 °C
Working temperature range (Process)	-40 ~ 120 °C
Compensated temperature range(Process)	-10 ~ 80 °C
Ambient temperature range	-20 ~ 60 °C
Thermal sensitivity shift	≤ ± 0.1 % F.S. in reference to 35 °C typical
Thermal zero shift	≤ ± 0.1 % F.S. in reference to 35 °C typical

Physical Specifications

Process connection	R(PT) 3/8" (M) standard
	Female thread & other connections are available on request.
Electrical connection	DIN 43650, Cable or M12 X 1.0 connector
Process media (fluid)	Gases and liquids compatible with AISI 316L
Materials wetted by process	AISI 316
	Stainless steel (housing – non wetted part)
Enclosure rating	IP65
Influence of mounting position	Not critical
Weight	Approx. 250g
Option	Remote or Flush Diaphragm Seal

Dimension(mm)

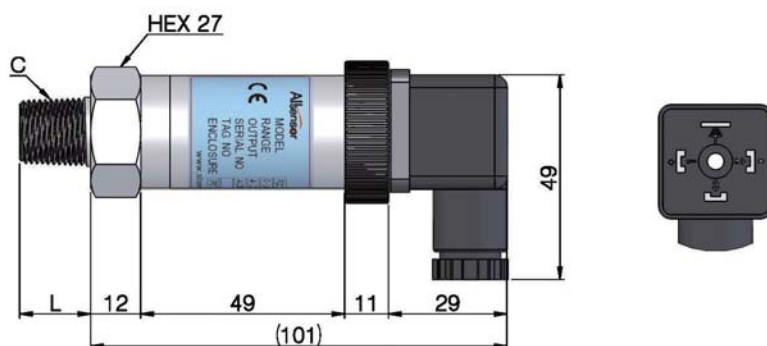

Process Connection		Output	mV	V, mA	V, mA	mA
		Wire	4 Wire	4 Wire	3 Wire	2Wire
C	L	①, Red	Excitation +	Power +	Power +	Power +
PT 1/4"	14	②, Black	Excitation -	Power -	Common	Return -
PT 3/8"	17	③, Green	Signal +	Signal +	Signal +	
PF 1/2"	18	④, White	Signal -	Signal -		
UNF7/16"	14	Power	V		12~33 V DC	

Ordering Information

P 2 0 1 G H

Model Name

P201 :
General Pressure Transmitter

Pressure Type

A : Absolute
G : Gauge

0 0 1 0

Pressure Range

Refer to pressure range code

M

Pressure Unit

M : MPa cm²
B : bar H : mmH₂O
P : psi G : mmHg
K : kgf/ T : torr

P A D

Process Connection

A : PT3/8" G : M20 x 1.5P
B : PF3/8" L : NPT 1/4"
C : PT1/4" M : NPT 3/8"
D : PF1/4" N : NPT 1/2"
E : PT1/2" V : VCR 1/4"
F : PF1/2" W : VCR 1/2"
O : Others

Out Put

H : 2Wire 4~20 mA F : 4Wire 4~20 mA
A : 4Wire mV J : 3Wire 0~10 V DC
C : 3Wire 0~5 V K : 4Wire 0~10 V DC
E : 3Wire 1~5 V

Pressure Sensor

P : Piezo-Resistive
H : SOS
T : Tantalum Diaphragm

Electric Connection

D : DIN 43650
C : Cable
M : M12 Connector